

4' X 6' X 2"


VERTICAL FOLD WALL PADS

2 panel vertical fold




apple
ATHLETIC PRODUCTS

FRONT OF PAD

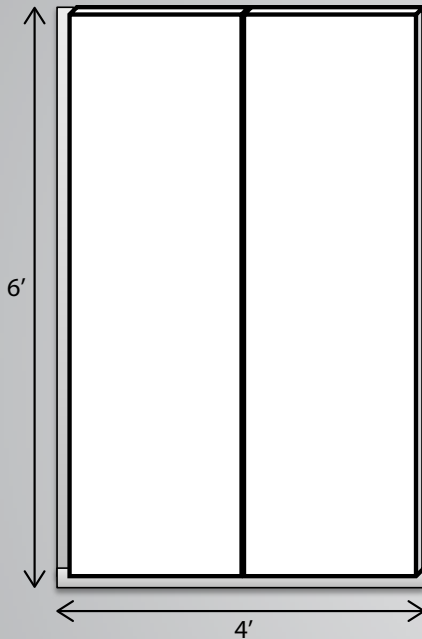

BACK OF PAD

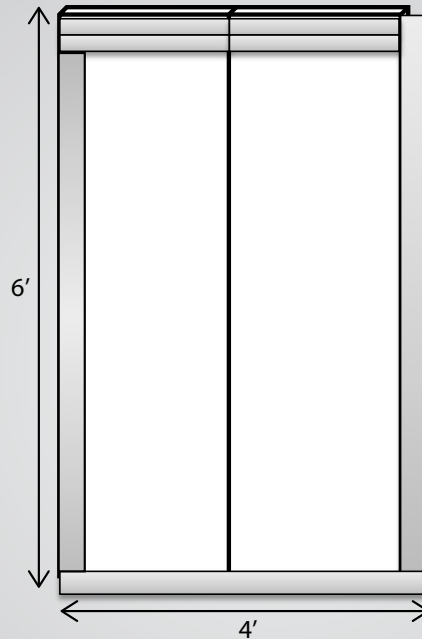

- Removable wall pad
- Folding 2 panel mat
- Dimensions: 4' x 6' x 2"
- VELCRO® Brand fasteners on 4 sides
- 18 oz woven polyester
- Core is made from polyethylene foam
- Latex free, lead free, phthalate free, mildew and rot resistant, UV resistant
- 2 year warranty on manufacturer defect
- Made in Canada

FOAM SPECIFICATIONS

- 2" thick cross linked polyethylene foam, closed cell, 2.0 lbs/cubic ft.
- Federal Motor Vehicle Safety Std. 302 Pass

COATED VINYL FABRIC (PVC)

1. California Bill 1108 compliant meeting less than 0.1% phthalates
2. Lead free test ASTM 1613
3. FR to NFPA 701 USA/CPAI 84 Section (2 second extinguish)
4. Fire Retardant to CAN/ULCS 109
5. Fire Retardant to ASTM E84 Class A

AVAILABLE COLOURS

Cobalt Royal Blue, Royal Blue 2, Navy Blue, Forest Green, Kelly Green, Red, Burgundy, Purple, Pink, Yellow, Orange, White, Grey, Tan, Brown, Black


SPECIAL FEATURES

- Overall Weight 18 oz per square yard
- Mildew and rot resistant
- Ultraviolet light resistant
- Weave count 20/20
- Tensile 444/441
- Adhesion 17 lbs/2"
- Tongue tear 81 x 83 lbs/inch
- Low cold crack -40 degrees Celsius
- VELCRO® Brand fasteners.

THREAD

Anafil Nylon Bonded Tex 90 (M30)

4" REMOVABLE WALL PADDING

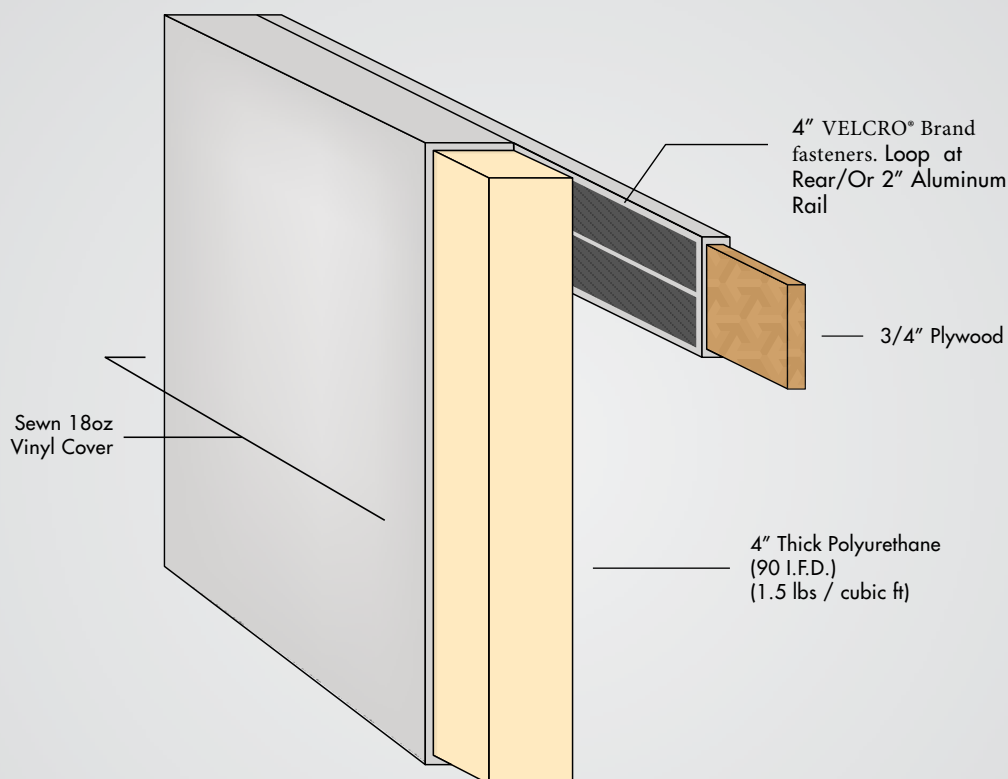

FOAM SPECIFICATIONS

- 4" thick polyurethane foam, open cell, 1.5 lbs/cubic ft., 90 I.F.D. (Indentation Force Deflection)
- Foam meets California Technical Bulletin 117 for Smolder flammability test
- Foam passes Standard Smolder Resistance of resilient filling material test (Technical Bulletin 117 2013)
- Federal Motor Vehicle Safety Std. 302 Pass

COATED VINYL FABRIC (PVC)

1. California Bill 1108 compliant meeting less than 0.1% phthalates
2. Lead free test ASTM 1613
3. FR to NFPA 701 USA/CPAI 84 Section (2 second extinguish)
4. Fire Retardant to CAN/ULCS 109
5. Fire Retardant to ASTM E84 Class A


AVAILABLE COLOURS

Cobalt Royal Blue, Royal Blue 2, Navy Blue, Forest Green, Kelly Green, Red, Burgundy, Purple, Pink, Yellow, Orange, White, Grey, Tan, Brown, Black

SPECIAL FEATURES

- Overall Weight 18 oz per square yard
- Mildew and rot resistant
- Ultraviolet light resistant
- Weave count 20/20
- Tensile 444/441
- Adhesion 17 lbs/2"
- Tongue tear 81 x 83 lbs/inch
- Low cold crack -40 degrees Celsius
- All VELCRO® Brand fasteners. used in manufacturing

2" or 4" THICK REMOVABLE WALL PAD

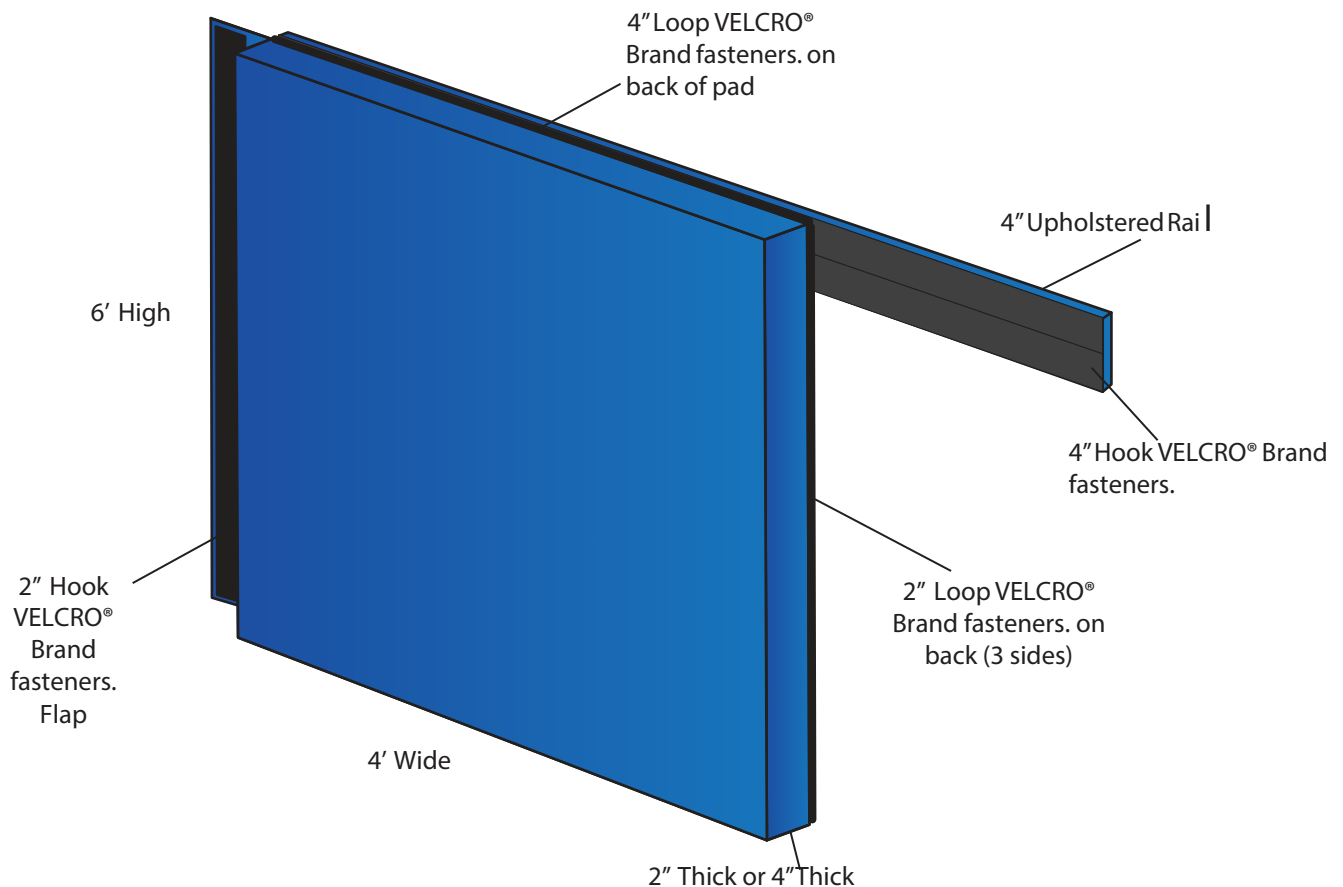

FOAM SPECIFICATIONS

- 2" or 4" thick polyurethane foam, open cell 1.9 (lbs/Ft.³) (108lbs)(Indentation Force Deflection)
- Foam meets California Technical Bulletin 117 for Smolder Flammability test
- CertiPUR-US® CERTIFICATION
Low emission VOC for improved indoor air quality

COATED VINYL FABRIC (PVC)

AVAILABLE COLOURS

Cobalt Royal Blue, Royal Blue 2, Navy Blue, Forest Green, Kelly Green, Red, Burgundy, Purple, Pink, Yellow, Orange, White, Grey, Tan, Brown, Black

SPECIAL FEATURES

- Overall weight 18 oz per square yard (P6)
- Mildew and rot resistant
- Ultraviolet and light resistant
- Weave count 20/20
- Tensile 444/441
- Adhesion 17 lbs/2"
- Tongue tear 81 x 83 lbs/inch
- Low cold crack -40 degrees Celsius

1. California Bill 1108 compliant meeting less than 0.1% phthalates
2. Lead free test ASTM 1613
3. FR to NFPA 701 USA/CPAI 84 Section (2 second extinguish)
4. Fire Retardant to CAN/ULCS 109
5. Fire Retardant to ASTM E84